


ELEVATION OF CHAIN LINK FENCING SYSTEM

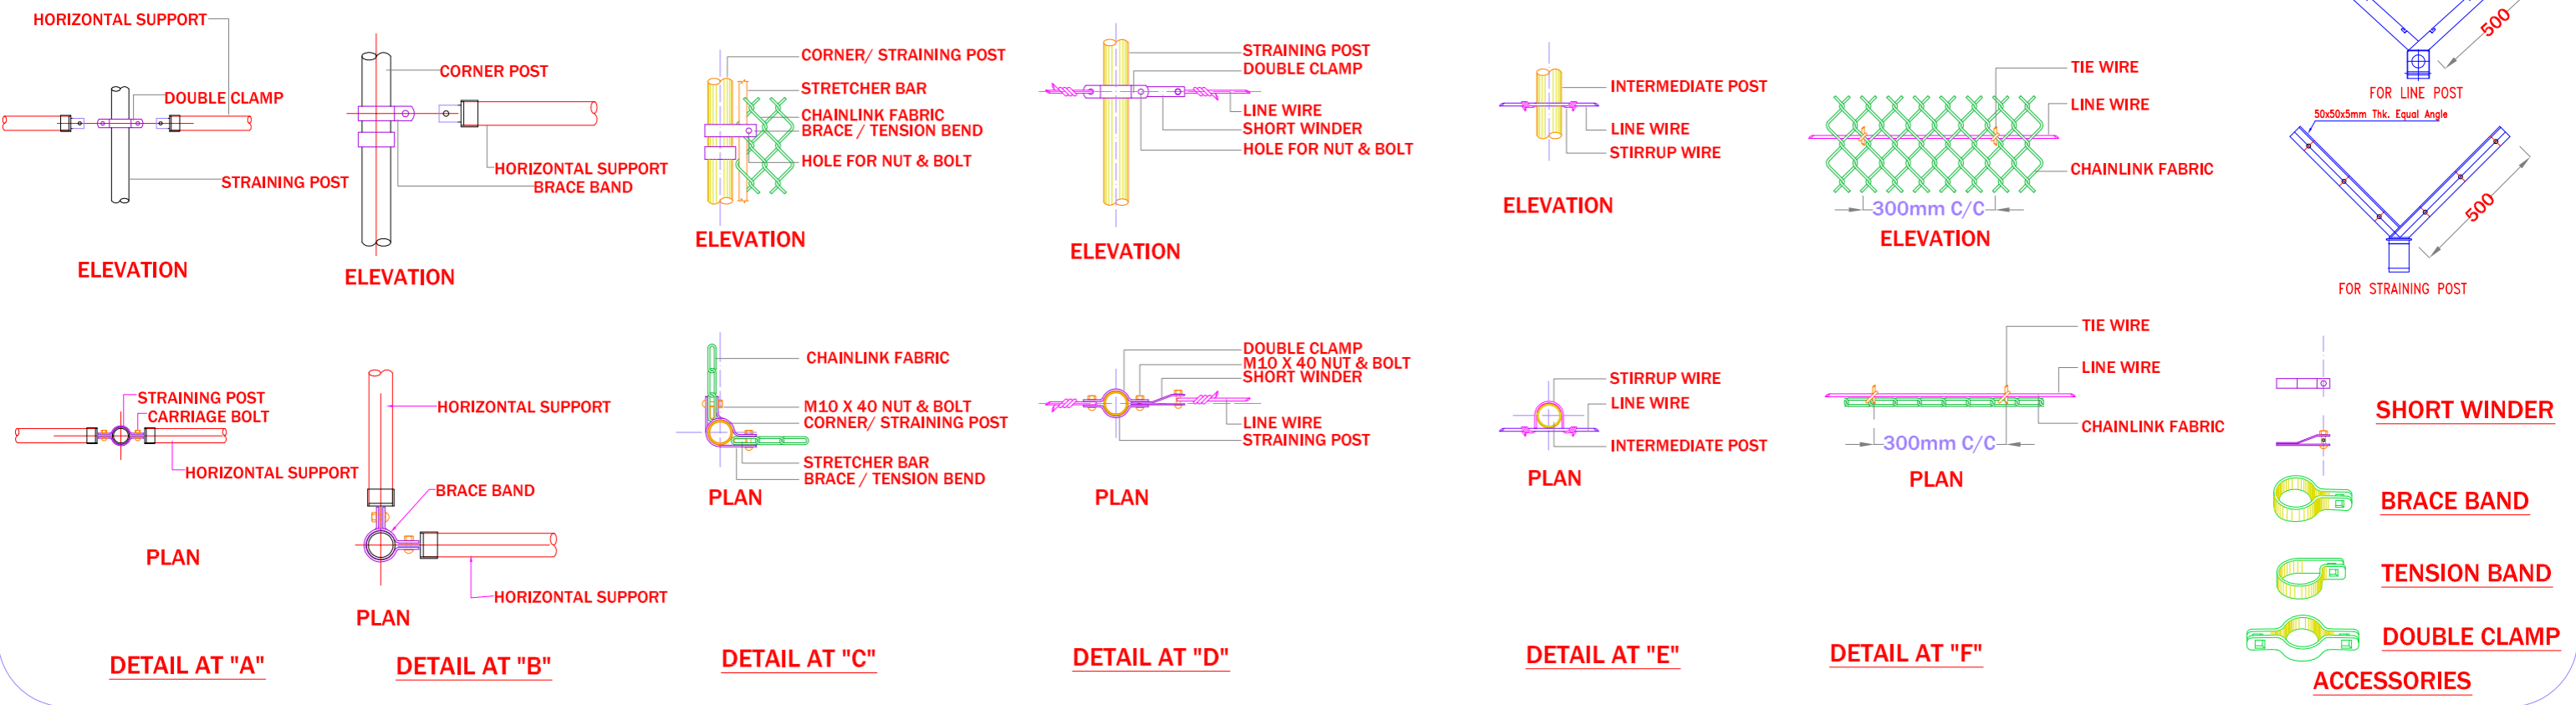

NO.	ITEM	SPECIFICATION
(A)	GALVANIZED CHAINLINK FENCING	WIRE Ø 2.50mm., FENCE HEIGHT - 2400mm, MESH SIZE 50mmX50mm, BOTH ENDS WISTED.
(B)	GALVANIZED LINE WIRE	WIRE Ø 3.50mm.(4 ROWS)
(C)	GALVANIZED STIRRUP WIRE	WIRE Ø 2.0mm
(D)	GALVANIZED TIE WIRE	WIRE Ø 1.80mm
(E)	INTERMEDIATE POST	60.8 mm OD (2.5 mm THK) LENGTH 2400mm ABOVE THE GROUND AND 500mm BELOW THE GROUND.
(F)	STRAINING POST	76.6 mm OD (3.0 mm THK) LENGTH 2400mm ABOVE THE GROUND AND 500mm BELOW THE GROUND.
(G)	END POST	76.6 mm OD (3.0 mm THK) LENGTH 2400mm ABOVE THE GROUND AND 500mm BELOW THE GROUND.
(H)	CORNER POST	76.6 mm OD (3.0 mm THK) LENGTH 2400mm ABOVE THE GROUND AND 500mm BELOW THE GROUND.
(I)	HORIZONTAL SUPPORT	48.8 mm OD (3.0 mm THK) LENGTH 3000mm.
(J)	CONCERTINA	Ø500mm BEFORE EXTENSION, CORE WIRE 2.50mm, BLADE PROFILE- MBBT, 55 LOOPS PER COIL.
(J)	BARBED WIRE	WIRE Ø 2.5/2.0mm , 3+3 ROWS ON EACH Y ARM.
(J)	STRETCHER BAR	25mm X 5.0 mmx2400mm GALVANISED.
(K)	Y ARMS	LIGHT EXTENSION ARMS MADE OUT OF 2mm SHEET METAL. AND HEAVY EXTENSION ARMS MADE OUT OF 50x50x5mm THK EQUAL ANGLE.
(L)	NUT & BOLT	GI NUT & BOLTS.

NOTES :-

(I) ALL DIMENSIONS ARE IN MILLIMETRES.

(II) ALL WIRE, POST & METALS ARE GALVANIZED.